




A Green Solutions Company™

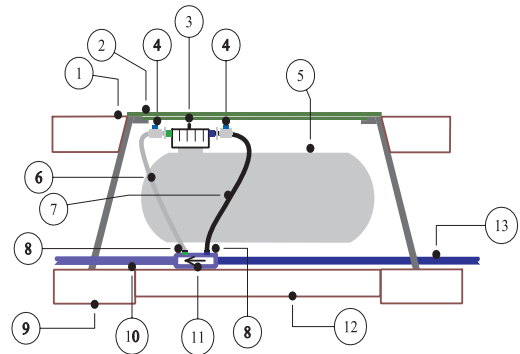

Downloadable CAD drawings and product specifications available at [www.ezflorfertilizing.com/3-4.asp](http://www.ezflorfertilizing.com/3-4.asp)

### EZ003-CX Features

<b>Tank Capacity - Liquid:</b>	Approx. 2.5 Gal. (9.5 liters)
<b>Tank Capacity - Water Soluble Fertilizer:</b>	Up to 15 - 18 lbs. (6.8 - 8.2 kg)
<b>Minimum Flow Requirements:</b>	2.5 gallons/hour (9.5 liters/hr.)
<b>Adjustable Feed Ratio Range:</b>	15,000:1/Slow setting to 400:1/Fast setting
<b>Water Volume to Empty Tank:</b>	37,500 gal (142 kl)/Slow setting 1,000 gal (3.8 kl)/Fast setting
<b>Unit Dimensions (LWH):</b>	21" x 8" x 11" (53cm x 20cm x 28cm)
<b>Valve Box Minimum (LWH):</b>	24" x 13" x 16" (61cm x 33cm x 41cm)
<b>Approx. Weight:</b>	11 lbs. (4.9 kg)

#### Suggested Landscape Coverage under normal watering conditions\*:

<b>100% turf</b>	Up to 15,000 sq ft (1,395 sq m)
<b>75% turf/25% trees/shrubs/flowers</b>	Up to 22,500 sq ft (2,092 sq m)
<b>50% turf/50% trees/shrubs/flowers</b>	Up to 30,000 sq ft (2,790 sq m)

\*Assumes a refill frequency of 4-6 weeks and watering every other day. Turf requires more water and therefore increases refill frequency. This unit will service larger areas when filled more frequently. Fertilizer requirements may be reduced when used in conjunction with an organic bio-stimulant.

### EZ003-CX (Standard Capacity Model)

**Warranty:** Five (5) years except under heavy pressure conditions or excessive temperature conditions where summer temperatures exceed 100° F (38° C). Heavy pressure conditions are when static line pressure exceeds 50 PSI (5.5 bars). See other detailed warranty and installation limitations at [www.ezflonjection.com/resources/warranty](http://www.ezflonjection.com/resources/warranty).

**Includes:**

- Bypass fitting, tubing and tubing clamps
- Pressure relief valve - rated 150 PSI (10 bars)
- Two (2) EZ Shutoff valves

**Does Not Include:**

Irrigation coupling connector. An approved EZ-FLO connection is the minimum required. An EZ-FLO ball valve connector (CBV) is required for low flow conditions, sloped landscapes or when using viscous products, such as heavy organic bio-stimulants, to ensure proper proportioning.

This system connects directly to the irrigation piping after the back flow prevention device and the tank is designed for use under constant pressure. EZ-FLO's patented flow process automatically adjusts to changes in water pressure and water flow without changing fittings. This product is designed to feed both sprinkler and drip irrigation zones for commercial, municipal, sports field, golf course, grower and residential applications. This system is designed for the delivery of products that are designated as non-hazardous.

A code compliant back flow prevention device is required for installation. Installation must follow local and state plumbing codes. Unless otherwise specified, a pressure vacuum breaker is the minimum back flow prevention device required according to University of Southern California - Foundation for Cross Connection Control and Hydraulic Research.