




Fertilize Responsibly™

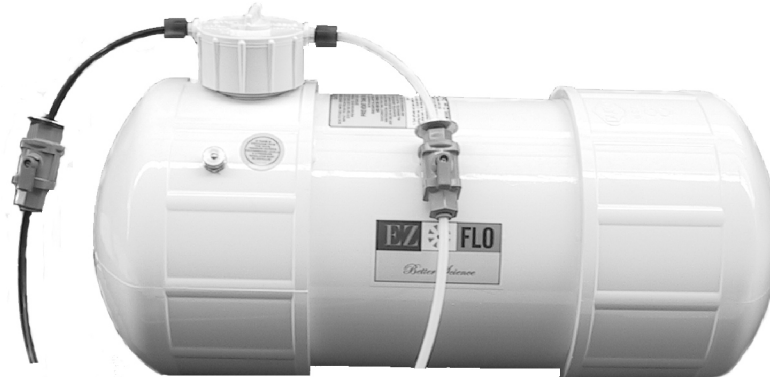

EZ005 Features

Tank Capacity - Liquid:	Approx. 4.25 Gal. (16 liters)
Tank Capacity - Water Soluble Fertilizer:	Recommended 25 lbs. (11.2 kg)
Minimum Flow Requirements:	2.5 gallons/hour (9.5 liters/hr.)
Adjustable Feed Ratio Range:	15,000:1/Slow setting to 400:1/Fast setting
Water Volume to Empty Tank:	63,500 gal (246 kl)/Slow setting 1,700 gal (6.4 kl)/Fast setting
Dimensions (LDH):	22" x 10" x 13" (56cm x 25cm x 33cm)
Approx. Weight:	19 lbs. (8.41 kg)
Suggested Landscape Coverage under normal watering conditions*:	
100% turf	Up to 17,000 sq ft (1,576 sq m)
75% turf/25% trees/shrubs/flowers	Up to 20,000 sq ft (1,840 sq m)
50% turf/50% trees/shrubs/flowers	Up to 30,000 sq ft (2,635 sq m)

*Assumes a refill frequency of 4-6 weeks and watering every other day. Turf requires more water and therefore increases refill frequency. This unit will service larger areas when filled more frequently.

EZ005-FX (Premium Model)

Warranty: Two (2) years under heavy pressure conditions or excessive temperature conditions where summer temperatures exceed 100° F (38° C). Heavy pressure conditions are when static line pressure exceeds 80 PSI (5.5 bars).

Includes:

Bypass fitting, tubing and tubing clamps
Pressure relief valve - rated 150 PSI (10 bars)
Two (2) EZ Shutoff valves

ALL installations require a coupling or an installation kit which is sold separately.

This system connects directly to the main line irrigation system between the back flow prevention device and the sprinkler valves so the tank is under constant pressure. EZ-FLO's patented flow process automatically adjusts to changes in pressure and flow without changing fittings. This product is designed to feed both underground sprinkler and drip irrigation zones for either residential or small commercial applications. This system is designed for the delivery of products that are designated as organic or non-hazardous.

A code compliant back flow prevention device is required for installation. Installation must follow local and state plumbing codes. Unless otherwise specified, a pressure vacuum breaker is the minimum back flow prevention device required according to University of Southern California - Foundation for Cross Connection Control and Hydraulic Research.