




A Green Solutions Company™

EZ Retro Coupling Connector

Retro (fit) coupling connectors are available in sizes from 3/4" and 1" with socket x socket connections. They are PVC schedule 40 with 1/4" nylon barbed tubing connectors. They are used to retrofit the EZ-FLO system into an existing irrigation flow line where tight conditions prevent putting in an EZ-FLO Coupling Connector. They connect with the 1/4" flexible tubing provided with the EZ-FLO system. (The nylon barbed tubing connectors are screwed-in after the connector has been glued into the irrigation flow line.)

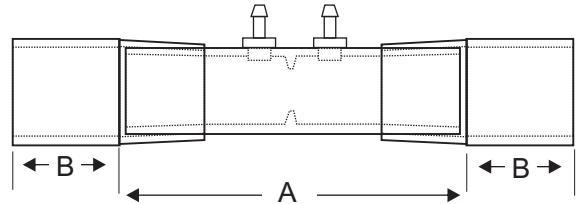


Part Number	Size	A	B
R-075	3/4" Soc	4 1/4"	1"
R-100	1" Soc	4 3/4"	1"

EZ Threaded Coupling Connector

Threaded coupling connectors are available in sizes from 3/4" and 1" with FIPT (female iron pipe thread) connections. They are PVC schedule 40 with 1/4" nylon barbed tubing connectors. They are used to connect the EZ-FLO system to the irrigation flow line with the 1/4" flexible tubing provided with the EZ-FLO system. They can be used to adapt to polyethylene or metal piping systems. Also available in BSPT for export customers.

*Larger sizes available upon request.

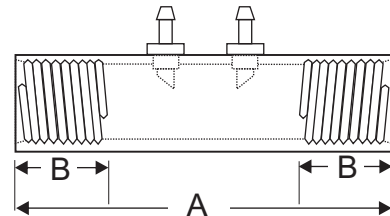

Part Number	Size	A	B
CT-075	3/4" FIPT	4 1/4"	1"
CT-100	1" FIPT	4 3/4"	1 1/4"

EZ Engineered Connections

We can assist in developing custom connections for larger piping configurations or for use with metal irrigation piping (ductile iron, steel or copper). These custom connections may involve the use of saddles, taps and welded outlets and will require consultation in order to establish the flow parameters that may be realized. Since each connection is specific to that particular piping system, the flow rates for the EZ-FLO systems connected in this fashion will vary from the published standards.